





Therma-Stor II-2

TS-224B
Revised 6/11

Heat Recovery Water Heater Specification Information



Therma-Stor plate design, with rapid, free-flowing paths for refrigerant gas, promotes excellent waste heat transfer throughout the tank.

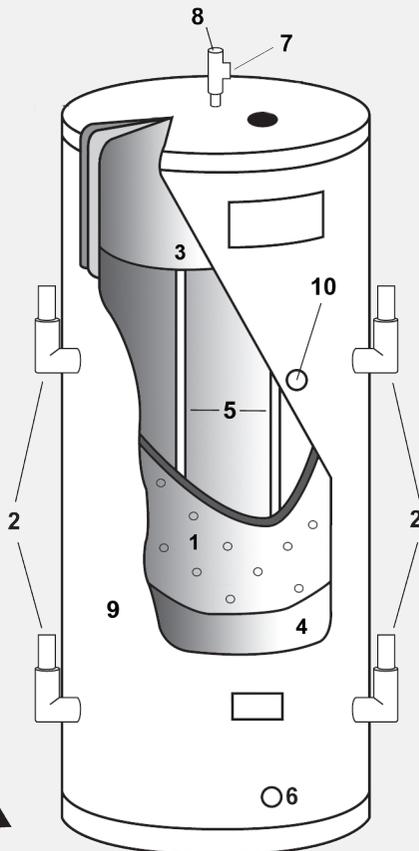

Construction Specifications

1. Dual-circuit refrigerant heat exchange plate designed for maximum heat transfer with minimum pressure drop.
2. 1-1/8" O.D. refrigerant upper inlets and lower outlets.
3. Industrial glass lined 114-gallon hot water storage tank.
4. 2" foam-in-place urethane insulation (R-16).
5. Dual anode protection against corrosion for extended tank life.
6. 1-1/4" male NPT water inlet.
7. 1-1/4" male NPT water outlet.
8. 150 psi and 210°F pressure/temperature relief valve.
9. Attractive enameled galvanized external wrapper.
10. Mid-tank 3/4" Male NPT connection for recirculating loop return or for aquastat (mid-port).

Overview

The Therma-Stor II-2 Heat Recovery Water Heater features a dual-circuit heat exchanger encompassing a 114-gallon water tank. Each circuit is compatible with refrigeration loads of up to 10 tons. (refer to chart on the back). Larger refrigeration loads can be accommodated by piping the circuits together or considering the Therma-Stor II-2 High Flow (HF) unit.

Operation

Therma-Stor II-2 heats water by transferring refrigerant superheat to water. Hot gas leaving the compressor(s) is piped through the refrigeration circuits en route to the condenser(s). The II-2 is compatible with any typical refrigeration system within sizing guidelines (using capillary tube systems with the Therma-Stor is normally not recommended). Plumbing recirculating loop return water to the mid-port allows recirc line losses to be heated with reclaimed heat without affecting overall heating efficiency. Hot water production depends on the evaporator load (capacity), run time of the compressor and water usage (see the Therma-Stor Return On Investment Calculation Form available at www.HeatWaterForFree.com for more information).

Typical Applications

The Therma-Stor II-2 is ideally suited for heating water in facilities with one or two compressor, mid-sized refrigeration systems. Common installations include:

- Restaurants
- Cafeterias
- Health care facilities
- Walk-in coolers/freezers

Unit Specifications

- Tank Dimensions
Diameter: 28¹/₈", Height: 62¹/₄"
- Unit Dimensions (with fittings)
Diameter: 30³/₈", Height: 67", Weight: 380 lbs
- 120 gallon nominal water capacity
- Max heat exchange rating 80,000 BTU/hr
- 150 PSI max operating water pressure
- Rated for 450 psi refrigerant operating water pressure
- R-16 insulation
- Double wall vented protection between refrigerant and water
- Triple leak checked, shipped with N₂ holding charge

Part No. 4018910

Specifications subject to change without notice.

Certifications

- UL/cUL® (SA5939)
- ASHRAE 90
- CRN's available upon request

Sizing Guidelines

The Therma-Stor II-2 can accommodate refrigeration loads of up to 10 tons per circuit depending on refrigerant and evaporator temperatures. The individual circuits can be piped together in parallel to accommodate larger loads (see diagrams below)*. Single and dual circuit units are available with larger refrigeration capacities (Therma-Stor II-1 and II-2 HF). Therma-Stor units are not intended as a substitute for air or water cooled condensers. These capacity ratings are based on approximately 15 lb. pressure drop at maximum capacity.

II-2		
Max. Recommended Capacity (in tons) for Typical Refrigeration Systems		
Refrigerant	Low Temperatures	Medium Temperatures
R-22	8.5	10
R-134A	7	8
R-404A, R-502, R-507	6	7

Water Temperature Control

Incorporating provisions in the refrigerant piping to bypass hot gas around the Therma-Stor directly to the condenser is recommended for large capacity systems. This prevents water from overheating during periods of sustained refrigeration operation with no/low water demand. A typical arrangement incorporates a three-way valve operated by an aquastat that senses water temperature. An alternate arrangement is a water bleed valve that would bleed hot water out of the tank. An aquastat can be mounted on the mid-port if there is no recirculation loop or connected to the water outlet piping to sense water temperature. Refer to diagram A below.

Supermarket Applications

The Therma-Stor II-2 is often plumbed in series with a conventional water heater. See diagram B. Consider the III-2 in lieu of the conventional water heater. See the III-2 spec sheet for more information.

In applications with "batch" cleaning, adding a Therma-Stor TS-120 storage tank is recommended. The TS-120 storage tank can be installed to accommodate thermal-syphoning (circulating without a pump). See diagram C, refer to Therma-Stor 120 spec sheet for more information.

If the Therma-Stor System is installed with a circulating loop, pump the water as slowly as possible and return to the 3/4" NPT mid-port. Do not circulate directly between the water heater and the Therma-Stor unit unless the heater has been deactivated so that it acts as storage only.

The Therma-Stor II-2 can also be installed in parallel to accommodate larger loads. See diagram D.

* Note: When piping both circuits in parallel, the model II-2 requires the refrigerant outlets to be piped together at the bottom of the tank (before being piped vertically).

